



FT038 SPRING RETURN CABLE REEL

Large thermoplastic reel for longer lengths of cable and use externally.



The FT038 is the largest of the thermoplastic spring return reels. Available in 16, 25 and 40-amp versions. Suitable for use outdoors (IP44) where longer lengths of cable are required and is capable of bringing power to any application in a safe and efficient manner. It is a sturdy, all thermoplastic design made from high-quality materials, electrically insulated and corrosion resistant. Depending on requirements, the desired length of cable is unwound; the remaining cable is neatly stored on the reel - safe from dirt and damage. When the cable connection is no longer required, a short pull on the stopper and the cable neatly rewinds. A spring return cable reel means a safe and organized workplace.


Features:

- Single & 3-phase options – up to 40A 5-wire capability
- 0.8 mOhm contact resistance
- IP44 protection – external use
- Heavy duty brass slip ring with silver contacts
- Signal transfer collector ring option – up to 25 lines
- Maintenance free ball bearing axle
- Adjustable ball stop

Supplied with a variety of lengths, sizes and types of cable, with an operating temperature range of +5°C to +60°C.

See specifications & full range:

Dimensions (mm): FT038

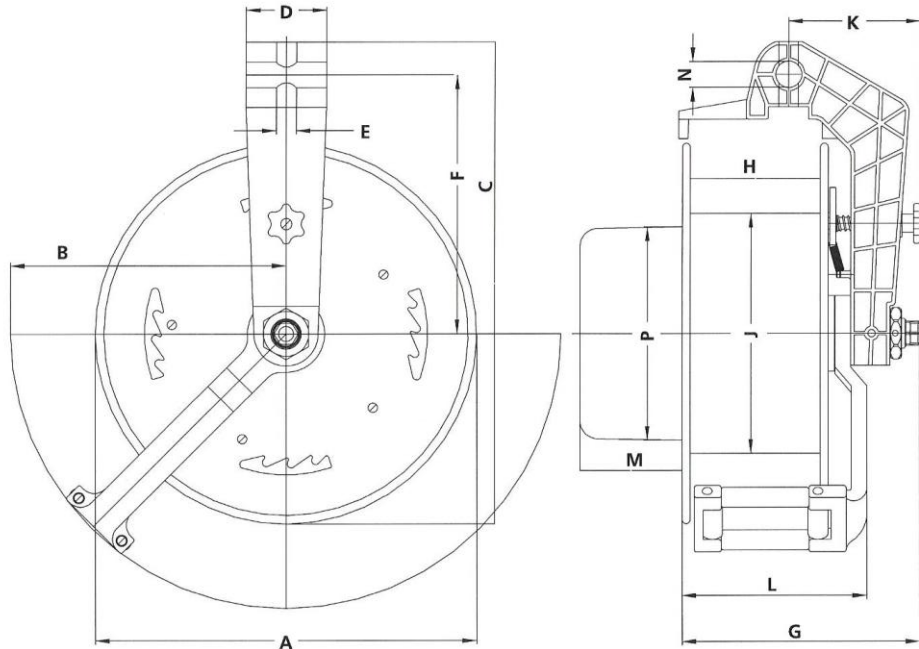

A	380
B	267
C	482
D	80
E	20
F	258
G	237
H	130
J	240
K	131
L	185
M	102
N	25
P	210

Specifications: FT038: -

Model	Cable Length Cores & Size	Max Load		Weight	Part No
		Wound	Unwound		
FT038.0320	20m 3 x 1.5mm ²	8A	16A	13kg	402001
FT038.0515	15m 5 x 1.5mm ²	6A	16A	14kg	402002
FT038.0715	15m 7 x 1.5mm ²	6A	16A	16kg	402003
FT038.0325	25m 3 x 1.0mm ²	4A	10A	12kg	402004
FT038.0315.32	15m 3 x 4.0mm ²	16A	32A	14kg	402007
FT038.0515.25	15m 5 x 2.5mm ²	9A	25A	16kg	402009
FT038.0415	15m 4 x 1.5mm ²	6A	16A	13kg	402012
FT038.0515.40	15m 5 x 4.0mm ²	14A	40A	17kg	402020
FT038.1010.16	10m 10 x 1.5mm ²	6A	16A	16kg	402023
FT038.2015.16	15m 20 x 1.0mm ²	4A	10A	14kg	402024
FTE038.0120	20m 1 x 10mm ²	-	-	11kg	402013
Swivel Bracket				0.4	401100